

RESCOM[®]

ELITE

**NEW
PRODUCT**



- Full Duplex
- Intrinsically Safe
- Personal Volume Control
- 3 Mile Range Per User
- Connects up to 10 Users
- Compliant & Certified by Major Industry Standards
- Low Battery Indicator for Entire Team
- Immune to RF Interference
- 5 Year Limited Warranty



*Confined Space Communication Leader
Since 1985*

HEADSETS




DQ70-206
Dual-Sided Heavy Duty Headset
Rear headband mount with Noise-Attenuating earcup and Noise-Cancelling Boom Mic



DQ70-208
Dual-Sided Heavy Duty Headset
Rear headband mount with Noise Attenuating earcup and Noise-Rejecting Throat Mic



DQ73-206
Dual-Sided Heavy Duty Headset
Hardhat mount with Noise-Attenuating earcup and Noise-Cancelling Boom Mic



DQ73-208
Dual-Sided Heavy Duty Headset
Hardhat mount with Noise Attenuating earcup and Noise-Rejecting Throat Mic




198920
Single-Sided Lightweight Headset
Lightweight headset with Noise-Cancelling Boom Mic (Available in headband and mesh mounted variants)



198921
Single-Sided Lightweight Headset
Low profile, mesh mounted headset with Noise-Rejecting Throat Mic



198933
Single-Sided Lightweight Headset
Standard profile, Mesh mounted with Noise-Cancelling Boom Mic




198934
Dual-Sided Lightweight Headset
Standard profile, Mesh mounted with Noise-Cancelling Boom Mic



198935
Single-Sided Watertight Headset
Standard profile, mesh mounted with Noise-Rejecting Throat Mic



198936
Dual-Sided Watertight Headset
Standard profile, mesh mounted with Noise-Rejecting Throat Mic



198925
Ultra lightweight Headset with Throat Mic
Ultra lightweight over ear headset with Noise-Cancelling Boom Mic



HH-A01 for Rosenbauer Heros Titan Pro
HH-B02 for Pacific F15
Helmet mounted, lightweight headset with Noise-Cancelling Boom Mic

ACCESSORIES

13



**DMI-E
Master Interface Box**
Centralized battery, On/Off switch, volume control and an industrial grade pouch to mount on belt/harness

14



**DSI-E
Slave Interface Box**
With volume control and an industrial grade pouch to mount on belt/harness

15



**JBI Series
4-8 Port Junction Box**
Sleek and sturdy ABS box with watertight connectors
JBI-4HC: 4 Port
JBI-6HC: 6 Port
JBI-8HC: 8 Port

16



**V-MIC™
Victim Locator Mic**
Super sensitive Mic used for victim location during a rescue

17



**RSP-05
Responder 5***
Water resistant speaker box with a PTT Mic allows local monitoring, eliminating the need for headsets

18



**DSI-AC/S16
Acoustic Coupler**
An Inter-Operability Interface that allows an isolated interconnection between two intrinsically safe systems

19



**SCR2N Series
Combined Safety/
Communication Rope™**
Use as a primary or secondary rescue line. Can be submerged 35ft in water

20



**EC2MMD02 Series
Communication Cable**
A rugged DuraCORE™ cable with a SEDFLEX™ jacket ensures flexibility in harsh environments

21



**C32D
Rope/Cable Coupler**
Used to connect two Rescom communication ropes (21) or cables (22) together

22



**C11
Bulkhead Pass-through**
Allows connection through steel vessel or walls of thickness up to 1". Ideal for aircraft fuel cell installation

23



**C09
T-connector**
Allows "Daisy Chain" of cable or rope connections, Can be attached directly to DMI or DSI or Junction Box

24



**040901 Series
Push-To-Mute (PTM) or
Push-To-Talk (PTT)**
Ideal for Supervisors. Can be Locked On or used as a momentary action

ACCESSORIES

25



RCC-03 or RCC-04 Portable Cable Reel

Built-in junction box for continuous communication with pneumatic tires for uneven surfaces

26



**330002 - S or M size
Rescom Rope bag**
(S:100ft and M:300ft rope)
Sturdy fabric with a clear pouch for rope logs, carry handle and shoulder strap


CABLE KITS

| | | Cable | DMI | DSI | 198920 | 198935 | Junction Box | Equipment Case |
|------------|-------|--------------------|-----|-----|--------|--------|--------------|----------------|
| RKE2MC-030 | 2 Man | 100' x 1 | 1 | 1 | 1 | 1 | 4 Port | Medium |
| RKE2MC-091 | 2 Man | 300' x 1 | 1 | 1 | 1 | 1 | 4 Port | Medium |
| RKE3MC-030 | 3 Man | 100' x 2 + 50' x 1 | 1 | 2 | 1 | 2 | 4 Port | Medium |
| RKE3MC-091 | 3 Man | 300' x 2 + 50' x 1 | 1 | 2 | 1 | 2 | 4 Port | Medium |
| RKE5MC-030 | 5 Man | 100' x 4 + 50' x 1 | 1 | 4 | 1 | 4 | 6 Port | Medium |
| RKE5MC-091 | 5 Man | 300' x 4 + 50' x 1 | 1 | 4 | 1 | 4 | 6 Port | Medium |
| RKE7MC-030 | 7 Man | 100' x 6 + 50' x 1 | 1 | 6 | 1 | 6 | 8 Port | Large |
| RKE7MC-091 | 7 Man | 300' x 6 + 50' x 1 | 1 | 6 | 1 | 6 | 8 Port | Large |

ROPE + CABLE KITS

| | | Rope | Cable | DMI | DSI | 198920 | 198935 | Junction Box | Rope Bags | Equipment Case |
|------------|-------|----------|---------|-----|-----|--------|--------|--------------|------------|----------------|
| RKE2MR-030 | 2 Man | 100' x 1 | 50' x 1 | 1 | 1 | 1 | 1 | 4 Port | 1 x Small | Medium |
| RKE2MR-091 | 2 Man | 300' x 1 | 50' x 1 | 1 | 1 | 1 | 1 | 4 Port | 1 x Medium | Medium |
| RKE3MR-030 | 3 Man | 100' x 2 | 50' x 1 | 1 | 2 | 1 | 2 | 4 Port | 2 x Small | Medium |
| RKE3MR-091 | 3 Man | 300' x 2 | 50' x 1 | 1 | 2 | 1 | 2 | 4 Port | 2 x Medium | Medium |
| RKE5MR-030 | 5 Man | 100' x 4 | 50' x 1 | 1 | 4 | 1 | 4 | 6 Port | 4 x Small | Medium |
| RKE5MR-091 | 5 Man | 300' x 4 | 50' x 1 | 1 | 4 | 1 | 4 | 6 Port | 4 x Medium | Medium |
| RKE7MR-030 | 7 Man | 100' x 6 | 50' x 1 | 1 | 6 | 1 | 6 | 8 Port | 6 x Small | Large |
| RKE7MR-091 | 7 Man | 300' x 6 | 50' x 1 | 1 | 6 | 1 | 6 | 8 Port | 6 x Medium | Large |

TYPICAL CONNECTION DIAGRAM

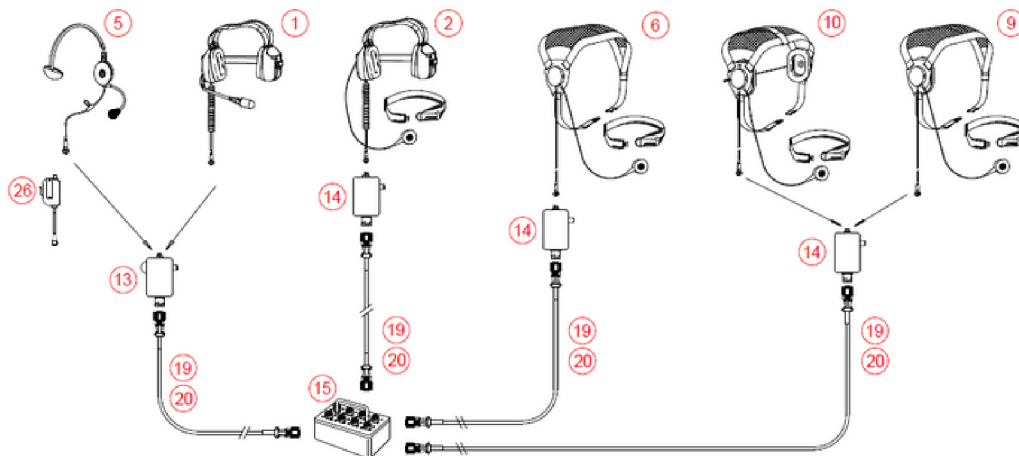

BATTERY LIFE FOR 3 AA BATTERIES:

3 Headsets= 108-138 hours
5 Headsets= 64-82 hours
7 Headsets= 46-58 hours
10 Headsets= 27-34 hours

CERTIFICATIONS

ATEX / IECEx

ATEX: ATX35707

IECEx: IECEx QPS 21.0006X

CE 2876 II 1 G Ex ia IIC T3 Ga
CE 2876 I M1 G Ex ia I 151°C Ma

Intrinsically Safe rated for prolonged exposure to hazardous gas atmospheres



QPS: LR1506

I.S. Class I, Div-1, GRP ABCD T3

Ex ia IIC T3 Ga Class I, Zone 0

AEx ia IIC T3 Ga, Ex ia IIC T3 Ga; Ex ia I T151°C Ma



FM 89135

NFPA

Combined Safety/ Communication Rope™ is compliant under Class - 7216 82

SCAN ME!

