

ACCESSORIES

25



**RCC-03 or RCC-04
Portable Cable Reel**
Built-in junction box for
continuous
communication with
pneumatic tires for
uneven surfaces

26



**330002 - S or M size
Rescom Rope bag**
(S:100ft and M:300ft rope)
Sturdy fabric with a clear
pouch for rope logs, carry
handle and shoulder
strap


CABLE KITS

		Cable	DMI	DSI	198920	198935	Junction Box	Equipment Case
RKE2MC-030	2 Man	100' x 1	1	1	1	1	4 Port	Medium
RKE2MC-091	2 Man	300' x 1	1	1	1	1	4 Port	Medium
RKE3MC-030	3 Man	100' x 2 + 50' x 1	1	2	1	2	4 Port	Medium
RKE3MC-091	3 Man	300' x 2 + 50' x 1	1	2	1	2	4 Port	Medium
RKE5MC-030	5 Man	100' x 4 + 50' x 1	1	4	1	4	6 Port	Large
RKE5MC-091	5 Man	300' x 4 + 50' x 1	1	4	1	4	6 Port	Large
RKE7MC-030	7 Man	100' x 6 + 50' x 1	1	6	1	6	8 Port	Large
RKE7MC-091	7 Man	300' x 6 + 50' x 1	1	6	1	6	8 Port	Large

ROPE + CABLE KITS

		Rope	Cable	DMI	DSI	198920	198935	Junction Box	Rope Bags	Equipment Case
RKE2MR-030	2 Man	100' x 1	50' x 1	1	1	1	1	4 Port	1 x Small	Medium
RKE2MR-091	2 Man	300' x 1	50' x 1	1	1	1	1	4 Port	1 x Medium	Medium
RKE3MR-030	3 Man	100' x 2	50' x 1	1	2	1	2	4 Port	2 x Small	Medium
RKE3MR-091	3 Man	300' x 2	50' x 1	1	2	1	2	4 Port	2 x Medium	Medium
RKE5MR-030	5 Man	100' x 4	50' x 1	1	4	1	4	6 Port	4 x Small	Large
RKE5MR-091	5 Man	300' x 4	50' x 1	1	4	1	4	6 Port	4 x Medium	Large
RKE7MR-030	7 Man	100' x 6	50' x 1	1	6	1	6	8 Port	6 x Small	Large
RKE7MR-091	7 Man	300' x 6	50' x 1	1	6	1	6	8 Port	6 x Medium	Large

TYPICAL CONNECTION DIAGRAM

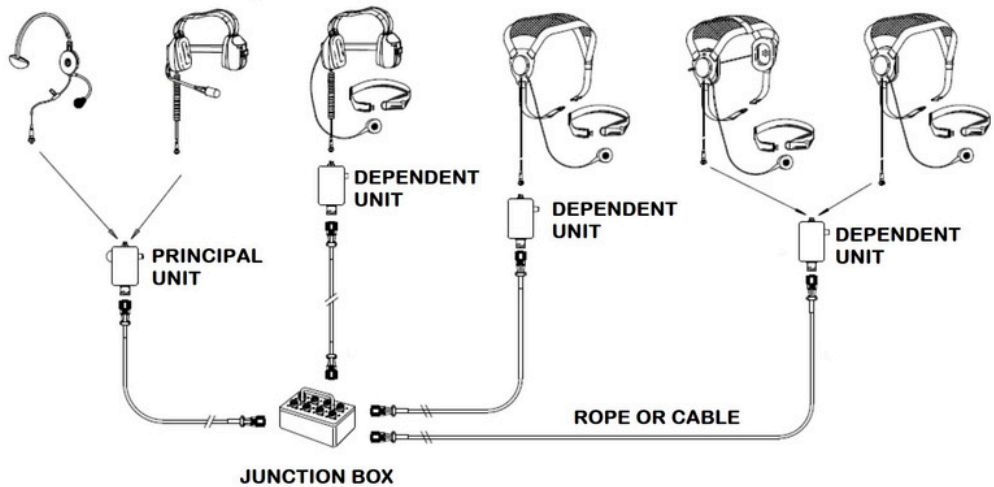

CERTIFICATIONS



ATEX: ATX35707
IECEX: IECEX QPS 21.0006X



QPS: LR1506



QUALITY
MANAGEMENT
SYSTEM
ISO 9001:2015



Combined Safety/Communication Rope™ is
compliant under Class - 7216 82

CE 2876 II 1 G Ex ia IIC T3 Ga
CE 2876 I M1 G Ex ia I 151°C Ma

I.S. Class I, Div-1, GRP ABCD T3
Ex ia IIC T3 Ga Class I, Zone 0
AEx ia IIC T3 Ga, Ex ia IIC T3 Ga; Ex ia I T151°C Ma

NOTE: Intrinsically Safe rated for prolonged exposure to hazardous gas atmospheres

1-800-665-2740 | +1-519-396-8555 | www.sedtechnologies.com

SCAN ME!



INTRINSICALLY SAFE
RESCUE
COMMUNICATION
SYSTEM



- Full Duplex
- Intrinsically Safe
- Personal Volume Control
- 3 Mile Range Per User
- Connects up to 10 Users
- Compliant & Certified by Major Industry Standards
- Low Battery Indicator for Entire Team
- Immune to RF Interference
- 5 Year Limited Warranty



Confined Space Communication Leader Since 1985

HEADSETS

1



**DQ70-206
Dual-Sided Heavy Duty Headset**
Rear headband mount with Noise-Attenuating earcup and Noise-Cancelling Boom Mic

2



**DQ70-208
Dual-Sided Heavy Duty Headset**
Rear headband mount with Noise Attenuating earcup and Noise-Rejecting Throat Mic

3




**DQ73-206
Dual-Sided Heavy Duty Headset**
Hardhat mount with Noise-Attenuating earcup and Noise-Cancelling Boom Mic

4




**DQ73-208
Dual-Sided Heavy Duty Headset**
Hardhat mount with Noise Attenuating earcup and Noise-Rejecting Throat Mic

5



**198920
Single-Sided Lightweight Headset**
Lightweight headset with Noise-Cancelling Boom Mic (Available in headband and mesh mounted variants)

6



**198921
Single-Sided Lightweight Headset**
Lowest profile, mesh mounted headset with Noise-Rejecting Throat Mic

7



**198933
Single-Sided Lightweight Headset**
Low profile, Mesh mounted with Noise-Cancelling Boom Mic

8



**198934
Dual-Sided Lightweight Headset**
Low profile, Mesh mounted with Noise-Cancelling Boom Mic

9



**198935
Single-Sided Watertight Headset**
Low profile, mesh mounted with Noise-Rejecting Throat Mic

10



**198936
Dual-Sided Watertight Headset**
Low profile, mesh mounted with Noise-Rejecting Throat Mic

11



HH-A01 for Rosenbauer Heros Titan Pro and HH-B01 for Pacific F15
Helmet mounted, lightweight headset with Noise-Cancelling Boom Mic

BATTERY LIFE FOR 3 AA BATTERIES:

2 Headsets = 160-210 hours
3 Headsets = 108-138 hours
5 Headsets = 64-82 hours
7 Headsets = 46-58 hours
10 Headsets = 27-34 hours

ACCESSORIES

13



**DMI-E
Primary Interface Box**
Centralized battery, On/Off switch, volume control and an industrial grade pouch to mount on belt/harness

14



**DSI-E
Dependent Interface Box**
With volume control and an industrial grade pouch to mount on belt/harness

15



**JBI Series
4-8 Port Junction Box**
Sleek and sturdy ABS box with watertight connectors
JBI-4HC: 4 Port
JBI-6HC: 6 Port
JBI-8HC: 8 Port

16



**V-MIC™ (DSI-EVM)
Victim Locator Mic**
Super sensitive Mic used for victim location during a rescue

17



**RSP-05
Responder 5***
Water resistant speaker box with a PTT Mic allows local monitoring, eliminating the need for headsets

18



**DSI-EAC
Acoustic Coupler**
An Inter-Operability Interface that allows an isolated interconnection between two intrinsically safe systems

19



**SCR2N Series
Combined Safety/Communication Rope™**
Use as a primary or secondary rescue line. Can be submerged 35ft in water

20



**EC2MMD02 Series
Communication Cable**
A rugged DuraCORE™ cable with a SEDFLEX™ jacket ensures flexibility in harsh environments

21



**C32D
Rope/Cable Coupler**
Used to connect two Rescom communication ropes (19) or cables (20) together

22



**C11
Bulkhead Pass-through**
Allows connection through steel vessel or walls of thickness up to 1". Ideal for aircraft fuel cell installation

23



**C09
T-connector**
Allows "Daisy Chain" of cable or rope connections, Can be attached directly to DMI-E or DSI-E or Junction Box

24



**040901 Series
Push-To-Mute (PTM) or Push-To-Talk (PTT)**
Ideal for Supervisors. Can be Locked "On" or used as a momentary action