ACCESSORIES

25

RCC-03 or RCC-04
Portable Cable Reel
Built-in junction box for continuous communication with pneumatic tires for uneven surfaces

26

330002 - S or M size
Rescom Rope bag
(S:100ft and M:300ft rope)
Sturdy fabric with a clear pouch for rope logs, carry handle and shoulder strap

CABLE KITS

		Cable	*DMI*	*DSI*	*198920*	*198935*	*Junction Box*	*Equipment Case*
REK2MC-030	2 Man	100' x 1	1	1	1	1	4 Port	Medium
REK2MC-091	2 Man	300' x 1	1	1	1	1	4 Port	Medium
REK3MC-030	3 Man	100' x 2 + 50' x 1	1	2	1	2	4 Port	Medium
REK3MC-091	3 Man	300' x 2 + 50' x 1	1	2	1	2	4 Port	Medium
REK5MC-030	5 Man	100' x 4 + 50' x 1	1	4	1	4	6 Port	Large
REK5MC-091	5 Man	300' x 4 + 50' x 1	1	4	1	4	6 Port	Large
REK7MC-030	7 Man	100' x 6 + 50' x 1	1	6	1	6	8 Port	Large
REK7MC-091	7 Man	300' x 6 + 50' x 1	1	6	1	6	8 Port	Large

ROPE + CABLE KITS

		Rope	*Cable*	*DMI*	*DSI*	*198920*	*198935*	*Junction Box*	*Rope Bags*	*Equipment Case*
REK2MR-030	2 Man	100' x 1	50' x 1	1	1	1	1	4 Port	1 x Small	Medium
REK2MR-091	2 Man	300' x 1	50' x 1	1	1	1	1	4 Port	1 x Medium	Medium
REK3MR-030	3 Man	100' x 2	50' x 1	1	2	1	2	4 Port	2 x Small	Medium
REK3MR-091	3 Man	300' x 2	50' x 1	1	2	1	2	4 Port	2 x Medium	Medium
REK5MR-030	5 Man	100' x 4	50' x 1	1	4	1	4	6 Port	4 x Small	Large
REK5MR-091	5 Man	300' x 4	50' x 1	1	4	1	4	6 Port	4 x Medium	Large
REK7MR-030	7 Man	100' x 6	50' x 1	1	6	1	6	8 Port	6 x Small	Large
REK7MR-091	7 Man	300' x 6	50' x 1	1	6	1	6	8 Port	6 x Medium	Large

TYPICAL CONNECTION DIAGRAM

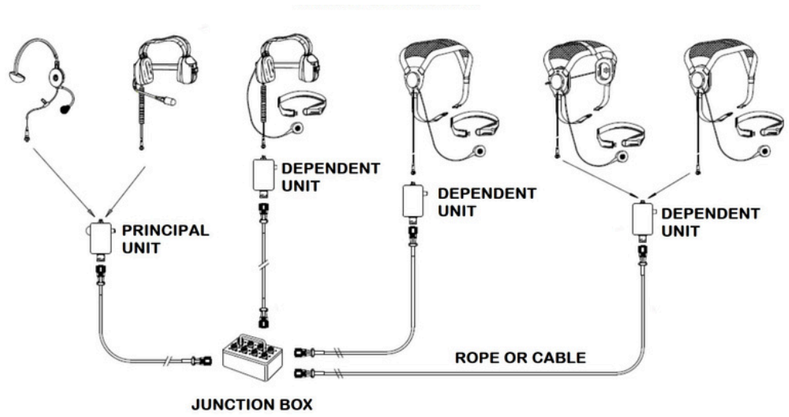

CERTIFICATIONS

ATEX: ATX35707
IECEX: IECEx QPS 21.0006X

QPS: LR1506

QUALITY MANAGEMENT SYSTEM ISO 9001:2026

Combined Safety/Communication Rope™ is compliant under Class - 7216 82

SCAN ME!

2876 II 1 G Ex ia IIC T3 Ga
2876 I M1 G Ex ia I 151°C Ma

I.S. Class I, Div-1, GRP ABCD T3
Ex ia IIC T3 Ga Class I, Zone 0
AEx ia IIC T3 Ga, Ex ia IIC T3 Ga; Ex ia I T151°C Ma

NOTE: Intrinsically Safe rated for prolonged exposure to hazardous gas atmospheres

1-800-665-2740 | +1-519-396-8555 | www.rescom.ca

INTRINSICALLY SAFE RESCUE COMMUNICATION SYSTEM

RESCOM ELITE

- Full Duplex
- Intrinsically Safe
- Personal Volume Control
- 3 Mile Range Per User
- Connects up to 10 Users
- Compliant & Certified by Major Industry Standards
- Low Battery Indicator for Entire Team
- Immune to RF Interference
- 5 Year Limited Warranty

SED®

Confined Space Communication Leader Since 1985

HEADSETS

1

DQ70-206
Dual-Sided Heavy Duty Headset
Rear headband mount with Noise-Attenuating earcup and Noise-Cancelling Boom Mic

2

DQ70-208
Dual-Sided Heavy Duty Headset
Rear headband mount with Noise Attenuating earcup and Noise-Rejecting Throat Mic

3

DQ73-206
Dual-Sided Heavy Duty Headset
Hardhat mount with Noise-Attenuating earcup and Noise-Cancelling Boom Mic

4

DQ73-208
Dual-Sided Heavy Duty Headset
Hardhat mount with Noise Attenuating earcup and Noise-Rejecting Throat Mic

5

198920
Single-Sided Lightweight Headset
Lightweight headset with Noise-Cancelling Boom Mic (Available in headband and mesh mounted variants)

6

198921
Single-Sided Lightweight Headset
Lowest profile, mesh mounted headset with Noise-Rejecting Throat Mic

7

198933
Single-Sided Lightweight Headset
Low profile, Mesh mounted with Noise-Cancelling Boom Mic

8

198934
Dual-Sided Lightweight Headset
Low profile, Mesh mounted with Noise-Cancelling Boom Mic

9

198935
Single-Sided Watertight Headset
Low profile, mesh mounted with Noise-Rejecting Throat Mic

10

198936
Dual-Sided Watertight Headset
Low profile, mesh mounted with Noise-Rejecting Throat Mic

11

HH-A01 for Rosenbauer Heros Titan Pro, HH-B01 for Pacific F15, HH-C01 for Manta SAR Helmet
Helmet mounted, lightweight headset with Noise-Cancelling Boom Mic

BATTERY LIFE FOR 3 AA BATTERIES:

2 Headsets = 160-210 hours
3 Headsets= 108-138 hours
5 Headsets= 64-82 hours
7 Headsets= 46-58 hours
10 Headsets= 27-34 hours

ACCESSORIES

13

DMI-E
Primary Interface Box
Centralized battery, On/Off switch, volume control and an industrial grade pouch to mount on belt/harness

14

DSI-E
Dependent Interface Box
With volume control and an industrial grade pouch to mount on belt/harness

15

JBI Series
***4-8 Port* Junction Box**
Sleek and sturdy ABS box with watertight connectors
JBI-4HC: 4 Port
JBI-6HC: 6 Port
JBI-8HC: 8 Port

16

V-MIC™ (DSI-EVM)
Victim Locator Mic
Super sensitive Mic used for victim location during a rescue

17

RSP-05
Responder 5*
Water resistant speaker box with a PTT Mic allows local monitoring, eliminating the need for headsets

18

DSI-EAC
Acoustic Coupler
An Inter-Operability Interface that allows an isolated interconnection between two intrinsically safe systems

19

Combined Safety/ Communication Rope™
Use as a primary or secondary rescue line. Can be submerged 35ft in water

20

EC2MMD02 Series
Communication Cable
A rugged DuraCORE™ cable with a SEDFLEX™ jacket ensures flexibility in harsh environments

21

C32D
Rope/Cable Coupler
Used to connect two Rescom communication ropes (19) or cables (20) together

22

C11
Bulkhead Pass-through
Allows connection through steel vessel or walls of thickness up to 1". Ideal for aircraft fuel cell installation

23

C09
T-connector
Allows "Daisy Chain" of cable or rope connections, Can be attached directly to DMI-E or DSI-E or Junction Box

24

040901 Series
Push-To-Mute (PTM) or Push-To-Talk (PTT)
Ideal for Supervisors. Can be Locked "On" or used as a momentary action

*Not Intrinsically Safe